



4x24 Distributed Tap

V 4.24 X.C-NF-AF | V 4.24 X.S-NJ-AF | V 4.24 X.L-NJ-AF | V 4.24 X.Z-NJ-AF



Benefits

- Bridges the gap between 1 gigabit and 10 gigabit networks
- Aggregation reduces required ports on monitoring devices
- Input filters eliminate packet loss
- Easy plug and play installation
- Remote management via telnet, HTTP, and SNMP
- Shields monitoring device from intruders

Features

- Full line-rate traffic capture
- LinkSafe™ and vAssure™ enabled for network reliability (copper only)
- Configurable input /output
- Selective aggregation
- Filtering on OSI layers 2-7 (including custom offset filter)
- Load Balancing
- vStack+™ Intelligent stacking
- Graphical user interface (HTTP/HTTPS)
- RMON
- SNMPv3
- RADIUS / TACACS+ Support (AAA)
- In-field upgradable

Distributed Taps


VSS Monitoring is at the forefront of selective aggregation technology to help end-users get the most from their network monitoring tools. Filtering provides a new level of sophistication to an already intelligent networking device. Through a graphical user interface or command line interface, users may configure any of the thousands of permutations of filters possible on the VSS Distributed Filter Taps, enabling their monitoring tools to scale to new levels like never before. Monitoring tools no longer need to process packets that are not of interest. This allows the tools to perform only their intended purpose and eliminate the overhead of unwanted packets.

The need for this has become apparent with the number of tools built upon commercial, off-the-shelf platforms whereby the monitoring tool vendor has utilized a standard chassis and has no hardware acceleration. Filtering can also be incredibly useful as a way to reduce traffic for upstream aggregation, thereby allowing users to “stack” distributed taps for port density.

Product Description

The 4x24 Distributed Tap is a highly flexible, intelligent traffic capture device for networks ranging from 10Mbps to 10Gigabit.

The device features four XFP ports, 16 dedicated copper UTP 10/100/1000 or 16 fiber Gigabit ports and eight SFP ports. Each of the 28 ports is independently controlled and flexible, allowing the user to forward any group of network ports to any monitoring device. All ports are configurable as either SPAN (unidirectional) inputs or monitor outputs. As an option, the LC ports can be ordered as inline tap ports for passive network access. With the inline build, the XFP ports remain Input/Output configurable.

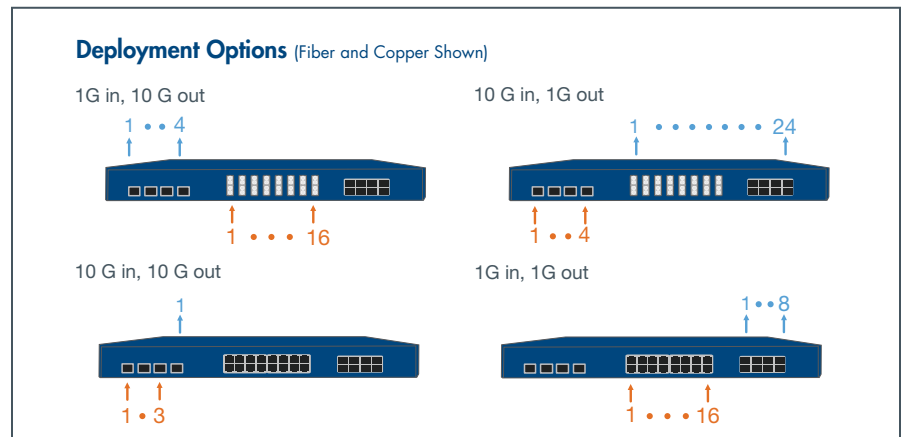

This device can be locally managed via a serial console and remotely managed via Telnet, HTTP, HTTPS, SNMPv3 and RMON. A filter option enables users to select, at the packet level, what traffic is forwarded to the designated monitor ports. Filtering allows traffic to be distinguished according to source and destination MAC/IP address as well as by specific protocols, such as HTTP, VoIP, and others. A custom filter offers more granular specification of a filter, specifically within the payload of a packet.

Load Balancing increases user control of traffic distribution to monitoring tools, increasing output capacity while maintaining session integrity. For example, a 10G network can be captured

and automatically balanced across multiple Gigabit monitor tools based on user-defined session criteria. Load Balancing can operate in tandem with filtering or independently.

All 10G Distributed Taps also support VSS' proprietary intelligent stacking technology, vStack+™, which enables traffic capture devices to be deployed in a redundant, low-latency mesh for total, dynamic, fault-tolerant visibility.

Redundant power supplies allow seamless transitions between power systems and ensure uptime. All VSS managed devices support field firmware updates for additional features and performance enhancements

Technical Specifications

Mechanical											
Total Weight:	15 lb. / 6.8 kg.										
Size:	17.3" (w) x 22.5" (d) x 1.75" (h) / (441mm x 572 mm x 44.5mm) 1RU High, Fits standard 19" Rack, 21" Deep										
Unit Type:	V 4.24 X.C-NF-AF	V 4.24 X.S-NJ-AF				V 4.24 X.L-NJ-AF		V 4.24 X.Z-NJ-AF			
Copper Network Ports:	(x16)	N/A				N/A		N/A			
Fiber Network Ports:	N/A	(x16)				(x16)		(x16)			
Input/Output Ports:	(x28)	(x28)				(x28)		(x28)			
SFP Ports:	(x8)	(x8)				(x8)		(x8)			
XFP 10 GigE Ports:	(x4)	(x4)				(x4)		(x4)			
Split Ratio:	90:10			80:20		70:30		60:40		50:50	
Wavelength:	Insertion Loss (dB)	Net	Mon	Net	Mon	Net	Mon	Net	Mon	Net	Mon
	850nm SR	< 1.6	< 10.8	< 2.0	< 8.0	< 2.7	< 6.3	< 3.3	< 4.9	< 4.1	< 4.0
	1300nm SR	< 1.3	< 10.8	< 1.9	< 8.0	< 2.5	< 6.3	< 3.2	< 4.9	< 4.0	< 4.0
	1310/1550nm LX/ZX	< 0.7	< 11.4	< 1.4	< 7.9	< 1.9	< 6.0	< 2.7	< 4.7	< 3.6	< 3.6
Performance											
Full line rate:	64 Gbps										
Environmental											
Temperature:	0 – 55 degrees C (operating); -20 – 100 degrees C (storage)										
Humidity:	5% – 95%, non-condensing										
Data											
Rates:	10 Mbps - 10 Gbps										
Types:	Ethernet, 10Base-T, 100Base-Tx, 1000 Base-T, 1000 Base-SX, 1000 Base-LX, 1000 Base-ZX, 10G Base-LR, 10G Base-ER, 10G Base-ZR, 10G Base-SR, 10G Base-CX4, 10G Base-T										
Propagation Delay											
Network Cable Distance:	100M										
Network:	< 1.2 Packets										



Network Visibility. Optimized.

USA
(Corporate HQ)
+ 1 650 697 8770 phone
+ 1 650 697 8779 fax
38 Adrian Court
Burlingame, CA 94010
USA

Japan
+ 81 422 26-8831 phone
+ 81 422 26-8832 fax
T's Loft 3F, 1-1-9,
Nishikubo, Musashino,
Tokyo, 180-0013
Japan

China
+ 86 10 6563-7771 phone
+ 86 10 6563-7775 fax
C519, 5 Floor, CBD
International Tower
16 Yong'An Dong Li,
Beijing, 100022 China

VSS Monitoring, Inc. is the world's leading innovator of Distributed Traffic Capture Systems™ and network taps, focused on meeting the rapidly evolving requirements of security and performance conscious network professionals. Distributed Traffic Capture Systems herald a new architecture of network monitoring, one which fundamentally improves its capability and price-performance.

VSS, Distributed Traffic Capture System, vAssure, LinkSafe, 12x4 Distributed Tap and 8x8 Distributed Tap are trademarks or registered trademarks of VSS Monitoring, Inc. in the United States and other countries. Any other trademarks contained herein are the property of their respective owners.